


SERIES E 80 150 ST SP

40
GAL/h21
GAL/hstainless
STEELICE
BANK

fizz

	SERIES E 80 ST SP	SERIES E 150 ST SP
Cooling capacity (gal/h)	21	40
Max continuous supply (gal)	12	20
Cold water temperature*	41 - 53.6 °F	
Pump	Professional rotary carbonation pump	
Cooling technology	Ice bank - single stainless steel coil	
Ice bank capacity (gal)	4	5
Ice bank (lb)	11	17.6
Condensation	Forced ventilation	
Refrigerant gas	R134a	
Adjustable thermostat	Yes	
Supply	115 V - 60 Hz	
Compressor power	360 kcal/h	700kcal/h
Absorbed power	330 W - 3.2 A	885 W - 8.35 A
Working room temperature	Min 61 °F - Max 90 °F	
Inlet water pipe	Ø3/8"	
Inlet CO ₂ pipe	Ø1/4"	
Dispensing area height (in)	8 - 9.5 - 11 - 13	7.95 - 9.4 - 11 - 13.2
Typology	Countertop	
Net weight (lb)	77	101
Gross weight (lb)	99	123
Dimensions W x D x H (in)	13.6 x 23.3 x 21.8	19.2 x 23.7 x 21.8
Packaging dimensions (in)	15.7 x 26.3 x 19.2	20.8 x 26.7 x 29.5
Dispensing options	Cold still water, cold sparkling water and room temperature water	
Materials	Robust stainless steel parts Plexiglass casing cover panel	
Taps	High quality stainless steel mechanical taps	

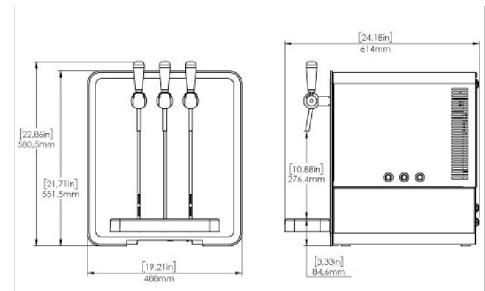

CERTIFICATIONS

DM 174/04



OTHER CHARACTERISTICS

Safety inlet valve
Easy access for complete service maintenance

